

DS-KIS605-P

Video Intercom Network Bundle

HIKVISION®



Key Feature

Indoor Station:

- Standard PoE
- 7-inch colorful non-touch screen with resolution 1024 × 600
- Views live video of door stations and linked cameras

Specification


Door station	
Camera	2MP HD camera
Resolution	Main stream: 1920 × 1080p, 720p Sub stream: 704 × 576
Night vision	Low illumination IR supplement mode:3 m
WDR	True WDR
Field of view	Horizontal: 129 ° Vertical: 75°
Video Compression Standard	H.264
Stream	Main stream: 1080p@30fps, 720p@25fps Sub stream: D1@25fps
Motion detection	Support
BLC	Support
DNR	Support
Anti-flicker frequency	50 Hz, 60 Hz
Door station	

Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
Audio intercom	Two-way audio communication
Door station	
RS-485	1
Alarm input	4
Debugging port	1
Grounding	1
TAMPER switch	1
Door station	
Power consumption	< 10 W
Working temperature	-40 ° C to +53 ° C (-40° F to 127.4° F)
Working humidity	10% to 95%
Dimension	138 mm × 65 mm × 27 mm
Installation	Surface mounting
Protection level	IP65
Button	1
Indicator	2

Power supply	IEEE802.3af, standard PoE 12 VDC
Door station	
Operation system	Embedded Linux operation system
Operation mode	Single-button
Flash	16 M, 32 M
RAM	256 M
Door station	
Relay	1
Reading frequency	13.56 MHz
Door station	
Network protocol	TCP/IP, RSTP
Wired network	10/100 Mbps Ethernet
Indoor station	
Display screen	7-inch
Display resolution	1024 × 600
Operation method	Physical button
Indoor station	
Audio input	Build-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711U, G.711A
Audio compression Rate	64 Kbps
Indoor station	
Network interface	RJ45, standard PoE for power supply
RS-485	/
Alarm input	8
Relay output	/
Power interface	1
Indoor station	
Power supply	12 VDC or standard PoE
Power consumption	≤ 6 W
Working temperature	-10 ° C to 50 ° C (-14 ° F to 122 ° F)
Working humidity	0% to 90%
Dimensions (W × H × D)	200 mm × 140 mm × 23.1 mm (7.87" × 5.51" × 0.69")
Installation	Wall mounting


Weight	683 g (with packaging) 355 g (without packaging)
Indoor station	
Operation system	Embedded RTOS operation system
Memory	64 MB
Flash	16 MB
Indoor station	
Wired network	10/100 Mbps self-adaptive
Protocol	TCP/IP, RTSP

Physical Interface

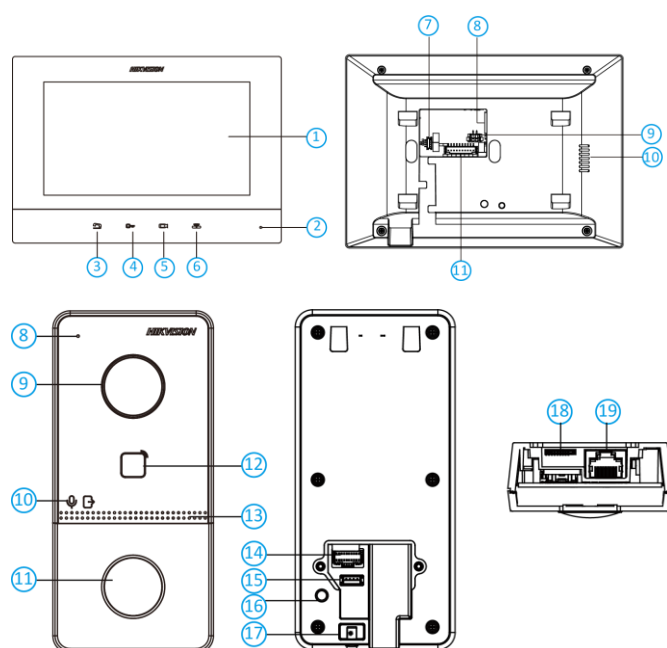

No.	Description	No.	Description
1	Screen	7	Debugging Port
2	Microphone	8	Network Interface
3	Call Button	9	Power Terminal
4	Unlock Button	10	Loudspeaker
5	Monitor Button	11	Alarm Terminal
6	Call Center Button		

Dimension

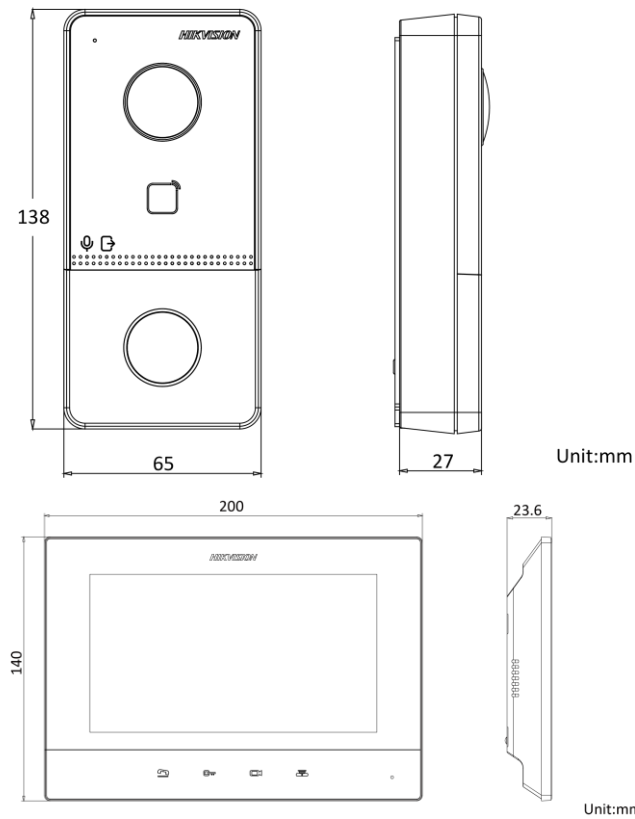

Available Model

DS-KIS605-P

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com