

NP-SC6550M-S X-Ray Security Inspection System

NP-SC6550M-S X-Ray security inspection system is an advanced security detection system designed for briefcases, postal bags, express mails, hand held parcels, and small packages checking with a world leading x-ray screening and multi-energy image processing technology based on Linux system.

With the popular tunnel size of 659mm (W) x 504 (H), compact and movable design, NP-SC6550M-S is an ideal standard security inspection solution for hotels, government agencies, transportation hubs, logistics industry, courts, prosecutors, prisons, embassies, factories, schools, hospitals, stadiums, exhibition halls, entertainment venues, etc.



Key Features

- High performance with HD image, strong penetration, precise recognition
- Adopts embedded Linux operating system with multi-core ARM
- Energy saving and environment protection with low power consumption
- Supports real-time monitoring
- Supports multiple image processing mode
- Supports POST (power on self-test)
- 64X zoom in
- One-touch power off
- Energy-saving working mode for conveyor
- Shock-proof design
- User friendly interface for easy operation

System Functions

X-ray Image processing functions:

Color/Black &White, local enhancement, high penetration, low penetration, super enhancement, organic stripping, inverse color, light increase, light reduce, grey scale scan, image zoom in, Pseudo Color, organic enhancement, suspicious threat mark alarm, edge enhancement.

System functions:

Power on self-diagnosis, multi levels user management, image management, TIP management, curve diagnosis, key board diagnosis, equipment information query, Multi-format image export, OSD operation function, image mirroring, 1-64 times stepless zoom in, magnifying glass, operator training, precise positioning of baggage images, clear channel reminder, one-key shutdown







Specifications


Model	NP-SC6550M-S
Tunnel size	659mm Wx504 mm H
Conveyor speed	0.22 m/s
Conveyor height	700mm
Max. load	150 kg (330.69 lb)
Penetration (steel)	30mm, 40+ mm available by customize
Wire resolution	40AWG
Spatial resolution	Vertical: 1.0 mm (0.04")
	Horizontal: 1.0 mm (0.04")
X-ray dose per inspection	< 2.5 μ Sv
X-ray leakage	< 1 μ Sv/h
X-ray generator	Anode Voltage: 140 kV, 100% Oil Cooling,
	Single generator, vertical beam direction.
Images colors	B/W, Colors
Images storage	10000 images
Film safety	ISO1600
Working temperature	5 °C to 40 ° C (41 °F to 104 °F)
Working humidity	0% to 90%
Operating System	Linux
Power supply	AC 220 V (+ 10% to -15%), 50 Hz (±3 Hz)
Power consumption	0.8 kw
Dimension (L x W x H) without table	2195mm x 902 mm x 1362.5 mm (86.42" x 35.51" x 53.64")
Weight	450 kg (992.08lb)
Extended table	614mm
Accessories	
Extended table	614mm x1 in exit (Included)
LCD monitor	17" LCD Color Monitor x1 included
Operation desk	X1 set included
Dedicated Key board & mouse	Standard included




Dimension

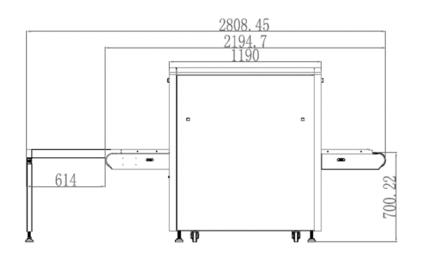



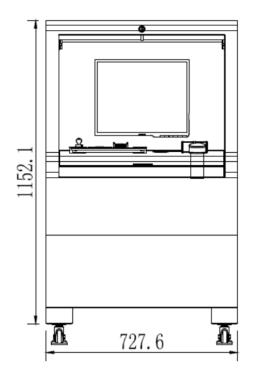

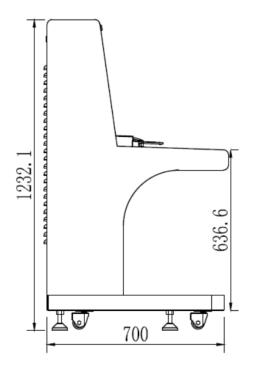




Scanned Images







Available Model

NP-SC6550M-S

Distributed by

 \square



HIKVISION°

Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T + 39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T +601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2018 | Data subject to change without notice |

202012