

## **DS-2TX3742-10P/Q** **Thermal Smart Linkage Tracking System**



Hikvision DS-2TX3742-10P/Q Thermal Smart Linkage Tracking System formed by one bi-spectrum bullet camera offering panorama and one optical PTZ camera smartly tracking moving targets. Thermal smart linkage tracking system is popularly applied in infrastructure such as airports, prisons, railway, city streets, campus, etc., in which smart tracking and perimeter protection are needed.

- 384 × 288 resolution thermal image, high sensitivity sensor, adjustable contrast
- Thermal image processing: Adaptive AGC, DDE, 3D DNR, NETD ≤ 35 mK (@25 °C, F#=1.0)
- PTZ camera with 4MP image, 42 × optical zoom and 500 m IR supplement
- Intelligent and persistent analytics working within the linkage system
- One-touch connection and automatic alignment between the images of bi-spectrum bullet camera and optical PTZ camera

## ▪ Specification

| System Function                                |                                                                                                                                                                                                                       |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Click Linkage                                  | One-Touch connection between bi-spectrum bullet camera and PTZ camera beforehand via VMS client                                                                                                                       |
| Tracking Mode                                  | Manual/Auto                                                                                                                                                                                                           |
| Manual Tracking                                | Drawing an area in VMS client within the field of the bullet camera, leading the PTZ camera zooming in                                                                                                                |
| Multi-targets Tracking                         | Up to 30 targets simultaneously                                                                                                                                                                                       |
| Event Tracking                                 | Intrusion Detection, Line Crossing Detection                                                                                                                                                                          |
| Tracking Duration                              | Configurable in VMS client for PTZ tracking                                                                                                                                                                           |
| Temperature Measurement                        | 3 temperature measurement rule types; 21 rules in total (10 points, 10 areas, and 1 line)                                                                                                                             |
| Temperature Range                              | - 20 °C to 150 °C (- 4 °F to 302 °F)                                                                                                                                                                                  |
| Temperature Accuracy                           | ± 8 °C (± 14.4 °F)                                                                                                                                                                                                    |
| Fire Detection                                 | Dynamic fire detection, up to 10 fire points detectable.                                                                                                                                                              |
| Bullet Camera- Thermal Module                  |                                                                                                                                                                                                                       |
| Image Sensor                                   | Vanadium Oxide Uncooled Focal Plane Arrays                                                                                                                                                                            |
| Resolution                                     | 384 × 288                                                                                                                                                                                                             |
| Pixel Pitch                                    | 17 μm                                                                                                                                                                                                                 |
| Spectral Range                                 | 8 μm to 14 μm                                                                                                                                                                                                         |
| NETD (Noise Equivalent Temperature Difference) | ≤ 35 mk (@ 25 °C, F# = 1.0)                                                                                                                                                                                           |
| Focal Length                                   | 9.7 mm                                                                                                                                                                                                                |
| IFOV                                           | 1.75 mrad                                                                                                                                                                                                             |
| Field of View                                  | 37.5° × 28.5° (H × V)                                                                                                                                                                                                 |
| Min. Focusing Distance                         | 1 m                                                                                                                                                                                                                   |
| Aperture                                       | F1.0                                                                                                                                                                                                                  |
| Digital Zoom                                   | ×2, ×4, ×8                                                                                                                                                                                                            |
| Bullet Camera- Optical Module                  |                                                                                                                                                                                                                       |
| Image Sensor                                   | 1/2.7" Progressive Scan CMOS                                                                                                                                                                                          |
| Resolution                                     | 2688 × 1520, 4 MP                                                                                                                                                                                                     |
| Shutter Speed                                  | 1 s to 1/100,000 s                                                                                                                                                                                                    |
| Min. Illumination                              | Color: 0.0089 Lux @(F1.6, AGC ON), B/W: 0.0018 Lux @(F1.6, AGC ON)                                                                                                                                                    |
| Focal Length                                   | 4 mm                                                                                                                                                                                                                  |
| Field of View                                  | 84° × 44.8° (H × V)                                                                                                                                                                                                   |
| Aperture                                       | F1.6                                                                                                                                                                                                                  |
| WDR                                            | 120 dB                                                                                                                                                                                                                |
| Bullet Camera- General                         |                                                                                                                                                                                                                       |
| Main Stream                                    | Optical channel<br>50 HZ: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720)<br>60 HZ: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)<br>Thermal channel<br>25 fps (1280 × 720, 704 × 576, 640 × 480, 352 × 288, 320 × 240) |

|                           |                                                                                                                                                                                      |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sub-stream                | Optical channel<br>50 Hz: 25 fps (704 × 576, 352 × 288, 176 × 144)<br>60 Hz: 30 fps (704 × 480, 352 × 240, 176 × 120)<br>Thermal channel<br>25 fps (704 × 576, 352 × 288, 320 × 240) |
| Video Compression         | Main Stream: H.265/H.264<br>Sub-Stream: H.265/H.264/MJPEG                                                                                                                            |
| Audio Compression         | G.711alaw/G.711ulaw/G.722.1/G.726/MP2L2/OPUS/PCM                                                                                                                                     |
| Alarm Input               | 2, alarm input (0-5 VDC)<br>2, alarm output                                                                                                                                          |
| Alarm Output              | 2-ch relay outputs, alarm response actions configurable                                                                                                                              |
| Audio Input               | 1, 3.5 mm Mic in/Line in interface.<br>Line input: 2-2.4 V [p-p], output impedance: 1 KΩ ± 10%                                                                                       |
| Audio Output              | Linear level, impedance: 600 Ω                                                                                                                                                       |
| Communication Interface   | 1, RJ45 10 M/100 M self-adaptive Ethernet interface.<br>1, RS-485 interface                                                                                                          |
| <b>Optical Speed Dome</b> |                                                                                                                                                                                      |
| Image Sensor              | 1/1.8" Progressive Scan CMOS                                                                                                                                                         |
| Min. Illumination         | Color: 0.002 Lux @ (F1.5, AGC ON), B/W: 0.0002 Lux @ (F1.5, AGC ON), 0 Lux with IR                                                                                                   |
| Resolution                | 2688 × 1520                                                                                                                                                                          |
| Focal Length              | 6.0 - 252 mm, 42 × optical zoom                                                                                                                                                      |
| Zoom Speed                | Approx. 4.8 s (Optical, Wide-Tele)                                                                                                                                                   |
| Digital Zoom              | 16 x                                                                                                                                                                                 |
| Field of View             | 58.7° to 2.0° (Wide-Tele)                                                                                                                                                            |
| Working Distance          | 100 mm to 1500 mm (Wide-Tele)                                                                                                                                                        |
| Aperture Range            | F1.2 to F4.6                                                                                                                                                                         |
| Shutter Speed             | 1 s to 30,000 s                                                                                                                                                                      |
| WDR                       | 140dB                                                                                                                                                                                |
| Image Enhancement         | 3D DNR, EIS, HLC/BLC, SVC                                                                                                                                                            |
| AGC                       | Auto/Manual                                                                                                                                                                          |
| White Balance             | Auto/Manual/ATW (Auto-tracking White Balance)/Indoor/Outdoor/Daylight Lamp/Sodium Lamp                                                                                               |
| Day & Night               | IR cut filter                                                                                                                                                                        |
| IR Supplement             | Up to 400 m                                                                                                                                                                          |
| Privacy Mask              | 24 programmable privacy masks                                                                                                                                                        |
| Optical Defog             | Yes                                                                                                                                                                                  |
| Pan Speed                 | configurable from 0.1° to 210°/s; preset speed: 280°/s                                                                                                                               |
| Tilt Speed                | configurable from 0.1° to 150°/s, preset speed 250°/s                                                                                                                                |
| Main Stream               | 60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)<br>50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720)                                                                         |
| Sub-Stream                | 60 Hz: 30 fps (704 × 480, 352 × 240, 176 × 120)<br>50 Hz: 25 fps (704 × 576, 352 × 288, 176 × 144)                                                                                   |
| Third Stream              | 50 Hz: 25 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 352 × 288, 176 × 144)<br>60 Hz: 30 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 352 × 240, 176 × 120)         |

|                              |                                                                                                                                                                                                                                                                                                                                              |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Compression            | Main Stream: H.265+/H.265/H.264+/H.264<br>Sub-Stream: H.265/H.264/MJPEG<br>Third Stream: H.265/H.264/MJPEG                                                                                                                                                                                                                                   |
| Audio Compression            | G.711u/G.711a/G.722.1/MP2L2/G.726/PCM                                                                                                                                                                                                                                                                                                        |
| Alarm Action                 | Preset, Patrol Scan, Pattern Scan, Memory Card Video Record, Trigger Recording, Notify Surveillance Center, Upload to FTP/Memory Card/NAS, Send Email                                                                                                                                                                                        |
| Alarm Input                  | 7, alarm input (0-5 VDC)                                                                                                                                                                                                                                                                                                                     |
| Alarm Output                 | 2, alarm output                                                                                                                                                                                                                                                                                                                              |
| Audio Input                  | 1, 3.5 mm Mic in/Line in interface.<br>Line input: 2-2.4 V [p-p], output impedance: 1 K $\Omega$ $\pm$ 10%                                                                                                                                                                                                                                   |
| Audio Output                 | Linear level, impedance: 600 $\Omega$                                                                                                                                                                                                                                                                                                        |
| Communication Interface      | 1, RJ45 10 M/100 M Self-adaptive Ethernet interface.<br>1, RS-485 interface                                                                                                                                                                                                                                                                  |
| <b>Network</b>               |                                                                                                                                                                                                                                                                                                                                              |
| Protocols                    | IPv4/IPv6, HTTP, HTTPS, 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP, UDP, IGMP, ICMP, DHCP, SSL/TLS, PPPoE                                                                                                                                                                                                      |
| Network Storage              | MicroSD/SDHC/SDXC card (up to 256 G) local storage, and NAS (NFS, SMB/CIFS), auto network replenishment (ANR)                                                                                                                                                                                                                                |
| API                          | ISAPI, HIKVISION SDK, open network video interface                                                                                                                                                                                                                                                                                           |
| Simultaneous Live View       | Up to 20 channels                                                                                                                                                                                                                                                                                                                            |
| User/Host level              | Up to 32 users, 3 levels: Administrator, Operator, User                                                                                                                                                                                                                                                                                      |
| Security                     | User authentication (ID and PW), MAC address binding, HTTPS encryption, IEEE 802.1x(EAP-MD5, EAP-TLS), access control, IP address filtering                                                                                                                                                                                                  |
| Client                       | iVMS-4200, Hik-Connect                                                                                                                                                                                                                                                                                                                       |
| Web Browser                  | Live view (plug-in allowed) : Internet Explorer 11<br>Live view (plug-in free) : Chrome 57.0 +, Firefox 52.0 +<br>Local service : Chrome 57.0+, Firefox 52.0 +                                                                                                                                                                               |
| <b>General</b>               |                                                                                                                                                                                                                                                                                                                                              |
| Adjustment Range             | Network Camera (Universal Joint Module): Pan: 90°, Tilt: -45° to 45°<br>Speed Dome: Pan: 360°, Tilt: -20° to 90°, Auto Flip                                                                                                                                                                                                                  |
| Mount                        | Pole Mount                                                                                                                                                                                                                                                                                                                                   |
| Menu Language                | 32 languages<br>English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil) |
| Power Supply                 | 24 VAC $\pm$ 25%, one power supply for whole system                                                                                                                                                                                                                                                                                          |
| Power Consumption            | max. 70 W<br>Speed Dome Consumption: max.60W (If powered separately)                                                                                                                                                                                                                                                                         |
| Working Temperature/Humidity | - 40 °C to 65 °C (-40 °F to 149 °F);<br>Humidity: 90% or Less                                                                                                                                                                                                                                                                                |
| Protection Level             | IP66 Standard; TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection                                                                                                                                                                                                                                             |
| Dimensions                   | 401 mm $\times$ 266.4 mm $\times$ 912.2 mm (15.8" $\times$ 10.5" $\times$ 35.9")                                                                                                                                                                                                                                                             |
| Weight                       | 12.9 kg (Approx. 28.4 lb)                                                                                                                                                                                                                                                                                                                    |

## ▪ Range Table

| VCA Range (Vehicles: 1.4 × 4.0 m) | VCA Range (Humans: 1.8 × 0.5 m) | Temperature Measurement (Object: 0.2 × 0.2 m) | Temperature Measurement (Object: 1 × 1 m) |
|-----------------------------------|---------------------------------|-----------------------------------------------|-------------------------------------------|
| 210m                              | 70m                             | 23m                                           | 114m                                      |

## ▪ DORI

\* The table is only for reference and the performance may vary according to different environment.

\* The optimal human detection, recognition, and identification distances are calculated according to Johnson's Criteria.

Detection Range: In order to distinguish an object from the background, the object must be covered by 1.5 or more pixels.  
Recognition Range: In order to classify the object (animal, human, vehicle, etc.), the object must be covered by 6 or more pixels.


Identification Range: In order to identify the object and describe it in details, the object must be covered by 12 or more pixels.

| Detection Range (Vehicles: 1.4 × 4.0 m) | Detection Range (Humans: 1.8 × 0.5 m) | Recognition Range (Vehicles: 1.4 × 4.0 m) | Recognition Range (Humans: 1.8 × 0.5 m) | Identification Range (Vehicles: 1.4 × 4.0 m) | Identification Range (Humans: 1.8 × 0.5 m) |
|-----------------------------------------|---------------------------------------|-------------------------------------------|-----------------------------------------|----------------------------------------------|--------------------------------------------|
| 902 m                                   | 294 m                                 | 225 m                                     | 74 m                                    | 113 m                                        | 37 m                                       |

## ▪ Available Model

DS-2TX3742-10P/Q

## ▪ Dimension

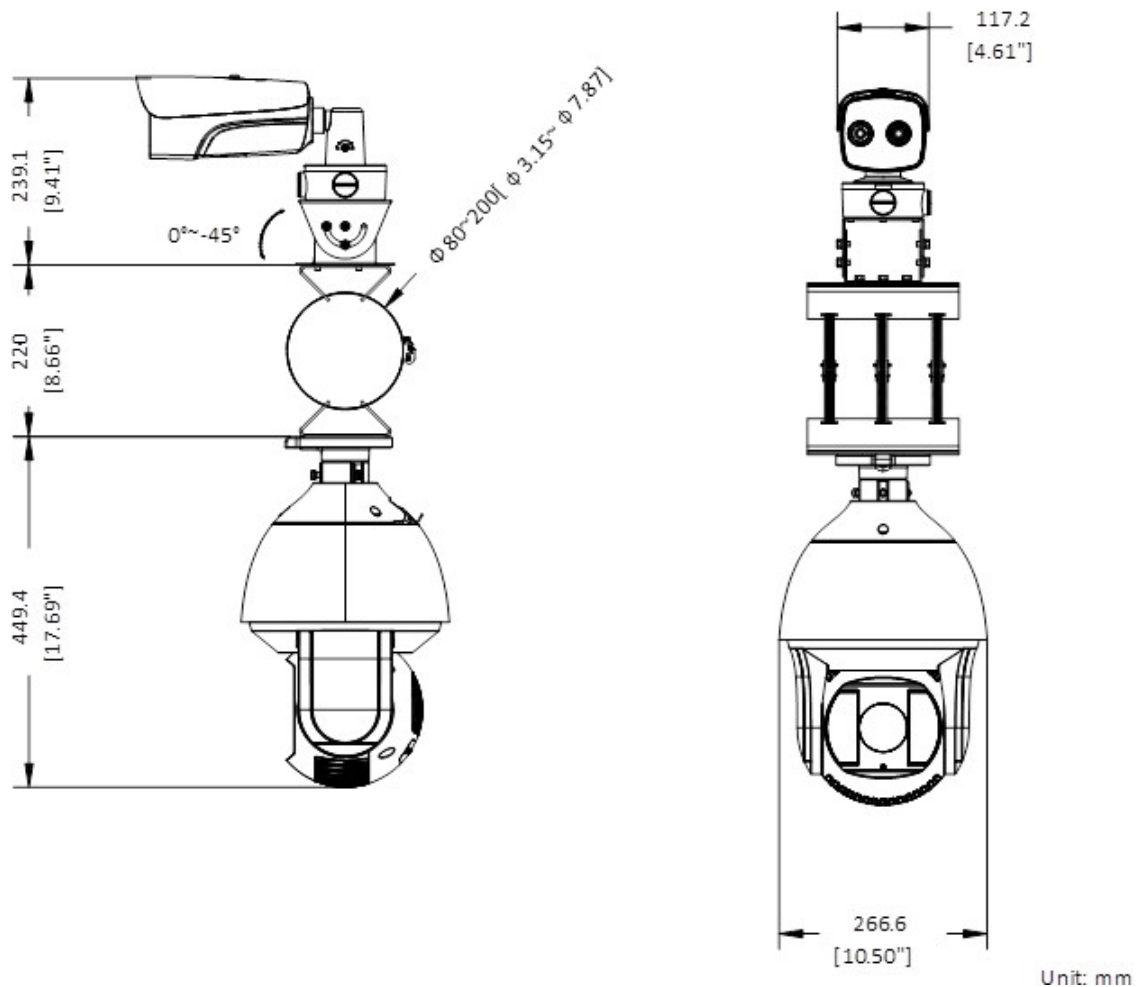

## ▪ Accessory

### ▪ Optional

| DS-2903ZJ<br>Horizontal Pole<br>Mount                                               | DS-2905ZJ<br>Vertical Pole Mount                                                     |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

COMPLIANCE NOTICE: The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.